



The European X-Ray Free-Electron Laser

Technical design report

Editors:

**Massimo Altarelli, Reinhard Brinkmann, Majed Chergui, Winfried Decking,
Barry Dobson, Stefan Düsterer, Gerhard Grübel, Walter Graeff,
Heinz Graafsma, Janos Hajdu, Jonathan Marangos, Joachim Pflüger,
Harald Redlin, David Riley, Ian Robinson, Jörg Rossbach, Andreas Schwarz,
Kai Tiedtke, Thomas Tschentscher, Ivan Vartaniants, Hubertus Wabnitz,
Hans Weise, Riko Wichmann, Karl Witte, Andreas Wolf, Michael Wulff,
Mikhail Yurkov**

Publisher:

DESY XFEL Project Group
European XFEL Project Team
Deutsches Elektronen-Synchrotron
Member of the Helmholtz Association

Notkestrasse 85, 22607 Hamburg
Germany
<http://www.xfel.net>
E-Mail: xfel-www@desy.de

Reproduction including extracts is permitted subject to crediting the source.

ISBN 978-3-935702-17-1

Contents

Authors	vii
Foreword	xiii
Executive summary	1
1 Introduction	11
1.1 Accelerator-based light sources	11
1.2 Free-electron lasers	13
1.3 Historical development of the XFEL	18
References	20
2 TTF/FLASH in the XFEL context	23
2.1 Historical background	23
2.2 TTF FEL, Phase 1	24
2.2.1 <i>Accelerator R&D</i>	24
2.2.2 <i>FEL research</i>	24
2.2.3 <i>Results</i>	25
2.2.4 <i>Experience from commissioning procedures</i>	27
2.3 TTF FEL, Phase 2 – FLASH	27
2.3.1 <i>Design</i>	27
2.3.2 <i>Installation</i>	29
2.3.3 <i>Accelerator commissioning</i>	30
2.3.4 <i>FEL commissioning</i>	32
2.3.5 <i>Experience form the first user operation periods</i>	35
2.3.6 <i>Next steps for FLASH</i>	38
References	39
3 General layout of the XFEL Facility	41
3.1 Introduction	41
3.2 Injector	43
3.3 Linear accelerator	44
3.4 Beam distribution system	45
3.5 Undulators	45
3.6 Photon beamlines	46
3.7 Experimental stations	46
3.8 Schenefeld campus	47

Contents

4	XFEL accelerator	49
4.1	Overview	49
4.1.1	<i>Introduction</i>	49
4.1.2	<i>Overall layout and choice of parameters</i>	49
4.1.3	<i>Operational flexibility and future options</i>	52
4.2	Linac	56
4.2.1	<i>Cavities</i>	56
4.2.2	<i>Auxiliaries</i>	68
4.2.3	<i>Vacuum system</i>	80
4.2.4	<i>High power RF system</i>	82
4.2.5	<i>Low level radio frequency control</i>	89
4.3	Injector	96
4.3.1	<i>General layout</i>	96
4.3.2	<i>Experimental status and future developments</i>	99
4.3.3	<i>Photocathode laser</i>	99
4.4	The bunch compressor system and start-to-end simulations	100
4.4.1	<i>Introduction and layout</i>	100
4.4.2	<i>Space charge and coherent synchrotron radiation effects</i>	101
4.4.3	<i>RF set-up and tolerances</i>	102
4.4.4	<i>Instabilities driven by space charge and coherent synchrotron radiation</i>	104
4.4.5	<i>Start-to-end simulation</i>	105
4.5	Beam optics and dynamics	108
4.5.1	<i>Main linac</i>	108
4.5.2	<i>Post-linac collimation</i>	113
4.5.3	<i>Beam distribution and undulators</i>	116
4.5.4	<i>Transverse beam stabilisation</i>	117
4.6	Beam diagnostics	120
4.6.1	<i>Requirements</i>	120
4.6.2	<i>Measurements of projected bunch properties</i>	121
4.6.3	<i>Measurement of slice properties</i>	123
4.7	Technical layout	128
4.7.1	<i>Warm vacuum system</i>	128
4.7.2	<i>Magnets</i>	132
4.7.3	<i>Kickers</i>	134
4.7.4	<i>Beam dumps</i>	135

4.8	Synchronisation system for the XFEL	139
4.8.1	<i>Introduction</i>	139
4.8.2	<i>Layout of the XFEL synchronisation system</i>	144
4.8.3	<i>Distribution of trigger and clock signals</i>	157
4.8.4	<i>Synchronisation of the LLRF for the main linac</i>	158
4.9	Summary of costs and manpower	160
4.9.1	<i>Costs and manpower requirements of the superconducting linac</i>	162
	References	164
5	Undulators for SASE and spontaneous emission	173
5.1	Overview	173
5.1.1	<i>Principles of XFEL operation</i>	173
5.1.2	<i>Design criteria for the European XFEL</i>	174
5.2	FEL radiation parameters	176
5.2.1	<i>Defining undulator parameters</i>	179
5.2.2	<i>Radiation parameters of SASE 3</i>	183
5.2.3	<i>Statistical properties of the radiation</i>	184
5.2.4	<i>Higher harmonics</i>	185
5.3	Spontaneous synchrotron radiation	186
5.3.1	<i>Undulator parameters</i>	186
5.3.2	<i>Spontaneous radiation parameters</i>	186
5.4	Undulators systems	189
5.4.1	<i>Choice of undulator parameters</i>	189
5.4.2	<i>Basic tolerance requirements</i>	193
5.4.3	<i>Undulator segments</i>	194
5.4.4	<i>Intersections</i>	198
5.4.5	<i>Other components</i>	202
5.4.6	<i>Implementation of undulator systems</i>	202
5.4.7	<i>Summary</i>	204
5.5	Photon diagnostics of FEL radiation	205
5.5.1	<i>Trajectory alignment</i>	206
5.5.2	<i>Gap adjustment</i>	208
5.5.3	<i>Phase tuning</i>	209
5.5.4	<i>Hardware setup</i>	210
5.5.5	<i>Test at PETRA II</i>	211
5.6	Future extensions to the European XFEL Facility	213
5.7	Summary of costs and manpower requirements	217
	References	218

Contents

6	Photon beamlines and scientific instruments	225
6.1	Overview of the X-ray systems	226
6.2	Photon beam transport	228
6.2.1	<i>Photon beamline concept</i>	228
6.2.2	<i>X-ray optical elements</i>	230
6.2.3	<i>Other beam transport elements</i>	243
6.2.4	<i>Description of the beamlines</i>	247
6.3	Photon beam diagnostics	255
6.3.1	<i>Characterisation of beam properties</i>	255
6.3.2	<i>Online diagnostics</i>	258
6.4	Scientific instruments	263
6.4.1	<i>Small Quantum Systems</i>	264
6.4.2	<i>High Energy Density matter experiments</i>	282
6.4.3	<i>Coherent X-ray scattering and lensless imaging in materials science</i>	303
6.4.4	<i>X-ray Photon Correlation Spectroscopy</i>	330
6.4.5	<i>X-ray absorption spectroscopy</i>	349
6.4.6	<i>Femtosecond diffraction experiments</i>	375
6.4.7	<i>Ultra-fast coherent diffraction imaging of single particles, clusters and biomolecules</i>	401
6.4.8	<i>Research and development on x-ray instrumentation</i>	441
6.5	Specific XFEL experiments instrumentation	449
6.5.1	<i>Sample environment and manipulation</i>	450
6.5.2	<i>X-ray optics</i>	453
6.5.3	<i>Optical lasers</i>	456
6.5.4	<i>Detectors and requirements</i>	465
6.6	Summary of cost and manpower requirements	486
	References	488
7	Infrastructure and auxiliary systems	513
7.1	Site layout and civil construction	513
7.1.1	<i>Overall site layout</i>	513
7.1.2	<i>Civil construction</i>	517
7.2	Conventional technical infrastructure	536
7.2.1	<i>Power distribution and power supplies</i>	536
7.2.2	<i>Magnet power supplies</i>	538
7.2.3	<i>Magnet water cooling and air conditioning</i>	539
7.2.4	<i>Heating, ventilation and air conditioning</i>	542
7.2.5	<i>Cryogenics</i>	544

7.2.6	<i>Accelerator Module Test Facility</i>	<i>554</i>
7.2.7	<i>Survey and alignment of XFEL.....</i>	<i>559</i>
7.2.8	<i>Installation of components.....</i>	<i>564</i>
7.3	<i>Controls and operation</i>	<i>566</i>
7.3.1	<i>Control systems.....</i>	<i>566</i>
7.3.2	<i>Radiation safety.....</i>	<i>571</i>
7.3.3	<i>General safety</i>	<i>575</i>
7.3.4	<i>Personnel interlock.....</i>	<i>578</i>
7.4	<i>Summary of costs and manpower requirements</i>	<i>582</i>
	<i>References</i>	<i>585</i>
8	<i>Commissioning and operation</i>	<i>589</i>
8.1	<i>General considerations</i>	<i>589</i>
8.2	<i>Transition phase</i>	<i>590</i>
8.3	<i>User operation</i>	<i>591</i>
8.4	<i>Operation budget</i>	<i>592</i>
9	<i>Project management and organisation</i>	<i>597</i>
9.1	<i>Introduction</i>	<i>597</i>
9.2	<i>Internal organisation of the XFEL GmbH</i>	<i>598</i>
9.2.1	<i>General aspects</i>	<i>598</i>
9.2.2	<i>Primary tasks and internal structure of the XFEL GmbH.....</i>	<i>598</i>
9.2.3	<i>Operation of the accelerator complex</i>	<i>602</i>
9.2.4	<i>Build-up of the XFEL staff complement.....</i>	<i>603</i>
9.2.5	<i>Status of personnel and recruitment policy</i>	<i>607</i>
9.3	<i>General project structure and procedures for the construction period</i>	<i>608</i>
9.3.1	<i>Principles</i>	<i>608</i>
9.3.2	<i>Collaboration agreements between contributing institutes and XFEL GmbH</i>	<i>609</i>
9.3.3	<i>Project management structure and oversight.....</i>	<i>610</i>
9.3.4	<i>Later operation of the equipment contributed in kind</i>	<i>611</i>
9.4	<i>Special relationship between the XFEL GmbH and DESY</i>	<i>612</i>
9.4.1	<i>DESY as contributor to the construction, commissioning and operation of the XFEL facility</i>	<i>612</i>
9.4.2	<i>DESY as host for the XFEL GmbH</i>	<i>613</i>
9.5	<i>Project management.....</i>	<i>614</i>
9.5.1	<i>Overview</i>	<i>614</i>
9.5.2	<i>Roles and responsibilities within the XFEL project.....</i>	<i>616</i>
9.5.3	<i>Project management tools.....</i>	<i>617</i>
	<i>References</i>	<i>618</i>

Contents

10 Cost and time schedule	619
10.1 Total project cost	619
10.2 Risk analysis	622
10.3 Operation cost	624
10.4 Time schedule	625
10.5 Budget profile	627
References	630

Authors

R. Abela⁴⁹, A. Aghababayan¹², M. Altarelli¹², C. Altucci⁶¹, G. Amatuni¹⁰, P. Anfinrud⁶⁰, P. Audebert³⁷, V. Ayvazyan¹², N. Baboi¹², J. Baehr¹³, V. Balandin¹², R. Bandelmann¹², J. Becker¹², B. Beutner²⁰, C. Blome¹², I. Bohnet¹², A. Bolzmann⁴, C. Bostedt⁵⁷, Y. Bozhko¹², A. Brandt¹², S. Bratos⁴¹, C. Bressler³⁵, R. Brinkmann¹², O. Brovko³², H. Brück¹², J.-P. Carneiro¹⁸, S. Casalbuoni¹², M. Castellano²², P. Castro¹², L. Catani²³, A. Cavalleri⁷⁰, S. Celik¹², H. Chapman³⁹, D. Charalambidis²⁶, J. Chen⁴⁷, M. Chergui³⁵, S. Choroba¹², A. Cianchi²³, M. Clausen¹², E. Collet⁶⁶, H. Danared⁵⁴, C. David⁴⁹, W. Decking¹², M. Dehler⁴⁸, H. Delsim-Hashemi²⁰, G. Dipirro²², B. Dobson⁸, M. Dohlus¹², S. Duesterer¹², A. Eckhardt²⁰, H.-J. Eckoldt¹², H. Edwards¹⁸, B. Faatz¹², M. Fajardo³⁰, A. Fateev³², J. Feldhaus¹², Y. Filipov³², K. Floettmann¹², R. Follath⁵, B. Fominykh³¹, M. French⁹, J. Frisch⁵⁴, L. Froehlich²⁰, E. Gadwinkel¹², L. García-Tabarés³⁸, J.J. Gareta⁵¹, T. Garvey³⁴, F. Gel'mukhanov⁵⁶, U. Gensch¹³, C. Gerth¹², M. Goerler¹², N. Golubeva¹², H. Graafsma¹², H.-J. Grabosch¹³, W. Graeff¹², O. Grimm¹², B. Griogoryan¹⁰, G. Grübel¹², C. Gutt¹², K. Hacker¹², L. Haenisch¹², U. Hahn¹², J. Hajdu^{53,71}, J. H. Han¹², M. Hartrott⁵, J. Havlicek¹², O. Hensler¹², K. Honkavaara²⁰, V. Honkimäki¹⁷, T. Hott¹², M.R. Howells⁴⁰, M. Huening¹², H. Ihee¹, F.Ö. Ilday⁶, R. Ischebeck⁵³, M. Jablonka¹⁴, E. Jaeschke⁵, K. Jensch¹², J.-P. Jensen¹², S. Johnson⁴⁹, L. Juha²⁹, F. Kaerntner⁴⁸, R. Kammering¹², H. Kapitza¹², V. Katalev¹², B. Keil⁴⁹, S. Khodyachykh¹³, R. Kienberger⁴⁴, J.-W. Kim⁴⁸, Y. Kim¹⁵, K. Klose¹², V. Kocharyan¹², W. Koehler¹³, M. Koerfer¹², M. Kollwe¹², Q. Kong¹⁷, W. Kook¹², D. Kostin¹², O. Kozlov³², D. Kraemer¹⁹, M. Krasilnikov¹³, B. Krause¹², O. Krebs¹², J. Krzywinski²⁸, G. Kube¹², M. Kuhlmann¹², H. Laich¹³, R. Lange¹², M. Larsson⁷², R.W. Lee³⁹, A. Leuschner¹², H. Lierl¹², L. Lilje¹², T. Limberg¹², A. Lindenberg⁵³, D. Lipka⁵, F. Loehl²⁰, K. Ludwig¹², M. Luong¹⁴, C. Magne¹⁴, A. Maquet³³, J. Marangos⁷, C. Masciovecchio¹⁶, M. Maslov²⁴, A. Matheisen¹², E. Matyushevskiy³², O. Matzen¹², H.-J. May¹², I. McNulty², D. McCormick⁵³, P. Meulen⁷², N. Meyners¹², P. Michelato²¹, N. Mildner¹², V. Miltchev²⁰, M. Minty¹², W.-D. Moeller¹², T. Möller⁵⁷, L. Monaco²¹, M. Nagl¹², O. Napoly¹⁴, G. Neubauer¹², P. Nicolosi⁶⁸, A. Nienhaus¹², D. Noelle¹², T. Nunez¹², F. Obier¹², A. Oppelt¹³, C. Pagani²¹, R. Paparella¹⁴, H.B. Pedersen⁴⁵, B. Petersen¹², B. Petrosyan¹², L. Petrosyan¹², A. Petrov¹², J. Pflueger¹², P. Piot¹⁸, A. Plech⁶³, E. Ploenjes¹², L. Poletto⁶⁸, G. Pöplau⁶⁴, E. Prat¹², S. Prat³⁴, J. Prenting¹², D. Proch¹², D. Pugachov⁴², H. Quack⁵⁹, B. Racky¹², D. Ramert¹², H. Redlin¹², K. Rehlich¹², R. Reininger⁵², H. Remde¹², D. Reschke¹², D. Richter⁵, M. Richter⁵⁰, S. Riemann¹³, D. Riley⁵¹, I. Robinson⁶⁷, J. Roensch²⁰, F. Rosmej⁶⁵, M. Ross⁵³, J. Rossbach²⁰, V. Rybnikov¹², M. Sachwitz¹³, E. Saldin¹², W. Sandner⁴³, J. Schäfer¹², T. Schilcher⁴⁹, H. Schlarb¹², M. Schloesser¹², V. Schlott⁴⁹, B. Schmidt¹², M. Schmitz¹², P. Schmueser²⁰, J. Schneider¹², E. Schneidmiller¹², F. Schotte⁶⁰, S. Schrader¹², S. Schreiber¹², C. Schroer⁵⁸, R. Schuch³, H. Schulte-Schrepping¹², A. Schwarz¹², M. Seidel⁴⁹, J. Sekutowicz¹², P. Seller⁹, D. Sellmann¹², F. Senf⁵, D. Sertore²¹, A. Shabunov³², S. Simrock¹², W. Singer¹², H. Sinn², R. Smith⁷, E. Sombrowski¹², A.A. Sorokin⁵⁰, E. Springate⁹, M. Staack¹², L. Staykov¹³, B. Steffen¹², B. Stephenson², F. Stephan¹³, F. Stulle⁴⁸, E. Syresin³², K. Sytchev³², V. Sytchev²⁴, G. Tallents⁶⁹, S. Techert⁴⁵, N. Tesch¹²,

Authors

H. Thom¹³, K. Tiedtke¹², M. Tischer¹², M. Tolan⁶², S. Toleikis¹², F. Toral³⁸, R. Treusch¹², D. Trines¹², V. Tsakanov¹⁰, I. Tsakov²⁵, T. Tschentscher¹², F.-R. Ullrich¹², U. van Rienen⁶⁴, A. Variola³⁴, I. Vartaniants¹², E. Vogel¹², J. Vogel¹⁷, R. Vuilleumier⁴¹, H. Wabnitz¹², R. Wanzenberg¹², J.S. Wark⁷⁰, H. Weddig¹², T. Weiland¹¹, H. Weise¹², M. Wendt¹⁸, R. Wenndorff¹³, R. Wichmann¹², I. Will⁴³, A. Winter¹², K. Witte¹², K. Wittenburg¹², P. Wochner⁴⁷, T. Wohlenberg¹², J. Wojtkiewicz¹², A. Wolf⁴⁶, M. Wulff¹⁷, M. Yurkov¹², I. Zagorodnov¹², P. Zambolin⁶⁸, K. Zapfe¹², P. Zeitoun³⁶, V. Ziemann⁷², A. Zolotov¹²

- 1 Advanced Institute of Science and Technology, 373-1, Guseongdong, Yuseonggu, Daejeon, 305-701, Republic of Korea.
- 2 Advanced Photon Source, Argonne National Laboratory, 9700 South Cass Avenue., Argonne, IL 60439, USA.
- 3 Atomic Physics Fysikum, Stockholm University, Alba Nova, 10691 Stockholm, Sweden.
- 4 Bayerische Julius-Maximilians Universität, Inst. f. Theor. Physik u. Astrophysik, Am Hubland, 97074 Würzburg, Germany.
- 5 BESSY GmbH, Albert-Einstein-Strasse 15, 12489 Berlin, Germany.
- 6 Bilkent University, Department of Physics, Ankara 06800, Turkey.
- 7 Blackett Laboratory, Department of Physics, Imperial College, London SW7 2AZ, UK.
- 8 CCLRC Daresbury Laboratory, Warrington, Cheshire, WA4 4AD, UK.
- 9 CCLRC Rutherford Appleton Laboratory, Chilton, Didcot, OX11 0QX, UK.
- 10 Center for the Advancement of Natural Discoveries using Light Emission CANDLE, Acharyan 31, 375040 Yerevan, Armenia.
- 11 Darmstadt University of Technology, FB18 - Fachgebiet TEMF, Schlossgartenstr. 8, 64289 Darmstadt, Germany.
- 12 Deutsches Elektronen-Synchrotron DESY, Notkestrasse 85, 22607 Hamburg, Germany.
- 13 Deutsches Elektronen-Synchrotron DESY, Platanenallee 6, 15738 Zeuthen, Germany.
- 14 DSM/DAPNIA, CEA Saclay, 91191 Gif s/ Yvette, France.
- 15 Duke University, FEL Laboratory, Durham, NC 27708-0319, USA.
- 16 Elettra Sincrotrone Trieste, Area Science Park, 34012 Basovizza, Trieste, Italy.
- 17 ESRF, B.P. 220, 6, rue Jules Horowitz, 38043 Grenoble Cedex, France.

Authors

- 18 Fermi National Accelerator Laboratory, MS 306, P.O. Box 500, Batavia, IL 60510, USA.
- 19 Gesellschaft für Schwerionenforschung, Planckstr. 1, 64291 Darmstadt, Germany.
- 20 Hamburg University, Inst. f. Experimentalphysik, Luruper Chaussee 149, 22761 Hamburg, Germany.
- 21 INFN Milano - LASA, via Fratelli Cervi 201, 20090 Segrate (MI), Italy.
- 22 INFN-LNF, via E. Fermi 40, I-00044 Frascati, Italy.
- 23 INFN-Roma2, via della Ricerca Scientifica 1, 00100 Roma, Italy.
- 24 Inst. High Energy Physics, 142284 Protvino, Moscow Region, Russia.
- 25 Institute for Nuclear Researches and Nuclear Energy, Tzarigradsko Shaussee Boulevard 72, 1784 Sofia, Bulgaria.
- 26 Institute of Electronic Structure and Laser, Foundation for Research and Technology, P.O.Box 1527, Vassilika Vouton, 71110 Heraklion, Greece.
- 27 Institute of Electronic Systems, Faculty of Electronics and Information Technologies, ELHEP Laboratory, Nowowiejska 15/19, Warsaw, Poland.
- 28 Institute of Physics, Polish Academy of Sciences, Al. Lotnikow 32/46, 02-668 Warsaw, Poland.
- 29 Institute of Physics, Academy of Science of the Czech Republic, Na Slovance 2, 18221 Praha 8, Czech Republic.
- 30 Instituto Superior Técnico, Av. Rovisco Pais, 1049-001 Lisbon, Portugal.
- 31 ITEP Moscow, Bolshaya Cheremushkinskaya, 25, 117218 Moscow, Russia.
- 32 Joint Inst. for Nuclear Research, 141980 Dubna, Moscow Region, Russia.
- 33 Laboratoire de Chimie Physique-Matière et Rayonnement, Université Pierre et Marie Curie, 11 Rue Pierre et Marie Curie, 75231 Paris Cedex 05, France.
- 34 Laboratoire de l'Accélérateur Linéaire, IN2P3-CNRS, Université de Paris-Sud, B.P. F-91898, Orsay, France.
- 35 Laboratoire de Spectroscopie Ultrarapide, Institut des Sciences et Ingénierie Chimiques, Ecole Polytechnique Fédérale de Lausanne, EPFL SB ISIC LSU, 1015 Lausanne-Dorigny, Switzerland.
- 36 Laboratoire d'Optique Appliquée LOA, ENSTA, Chemin de la Hunière, 91761 Palaiseau Cedex, France.

Authors

- 37 Laboratoire pour l'Utilisation des Lasers Intenses LULI, Ecole Polytechnique, 91128 Palaiseau, France.
- 38 Laboratorio Conjunto de Superconductividad Aplicada CIEMAT/CEDEX, Madrid, Spain.
- 39 Lawrence Livermore National Laboratory, 7000 East Avenue Livermore, CA 94550, USA.
- 40 LBNL, 1 Cyclotron Road, Berkeley, CA 94720 USA.
- 41 LPTL, Université Pierre et Marie Curie, 4 Place Jussieu, 75252 Paris Cedex 05, France.
- 42 Lund University, MAX-Lab Box 118, 22100 Lund, Sweden.
- 43 Max-Born-Institut, Max-Born-Str. 2a, 12489 Berlin, Germany.
- 44 Max-Planck-Institut für Quantenoptik, Hans-Kopfermann-Strasse 1, 85748 Garching, Germany.
- 45 Max-Planck-Institut für biophysikalische Chemie, Am Faßberg 11, 37077 Göttingen, Germany.
- 46 Max-Planck-Institut für Kernphysik, Postfach ..., 69029 Heidelberg, Germany.
- 47 Max-Planck-Institut für Metallforschung, Heisenbergstraße 3, 70569 Stuttgart, Germany.
- 48 MIT, Department of Electrical Engineering and Computer Science, 77 Massachusetts Avenue, Cambridge, MA 02139, USA.
- 49 Paul Scherrer Institut, CH-5232 Villigen PSI, Switzerland.
- 50 Physikalisch Technische Bundesanstalt, Abbestrasse 2-12, 10587 Berlin, Germany.
- 51 Queen's University, School of Mathematics and Physics, Belfast, BT7 1NN, UK.
- 52 Scientific Answers & Solutions, 5708 Restal St, Madison, WI 53711, USA.
- 53 Stanford Linear Accelerator Center, 2575 Sand Hill Road, Menlo Park, CA 94025, USA.
- 54 Stockholm University, Manne Siegbahn Laboratory, Frescativägen 24, S-104 05 Stockholm, Sweden.
- 55 Technical University of Lodz, Department of Microelectronics and Computer Science, Al. Politechniki 11, Lodz, Poland.

- 56 Theoretical Chemistry, Department of Biotechnology, Royal Institute of Technology (KTH), Alba Nova University Center, Roslagstullbacken, 10691 Stockholm, Sweden.
- 57 TU Berlin, Institut für Atomare Physik, Hardenbergstrasse 36, PN 3-1, 10623 Berlin, Germany.
- 58 TU Dresden, Department of Physics, 01062 Dresden, Germany.
- 59 TU Dresden, Institut für Energietechnik, 01062 Dresden, Germany.
- 60 Ultrafast Biophysical Chemistry Section, NIDDK, National Institutes of Health, Bethesda, MD 20892-0520, USA.
- 61 Università “Frederico II” di Napoli, Dipartimento di Scienze Fisiche, Napoli, Italy.
- 62 Universität Dortmund, Fachbereich Physik, Otto-Hahn Str. 4, 44227 Dortmund, Germany.
- 63 Universität Konstanz, Fachbereich Physik, Universitätsstr. 10, 78457 Konstanz, Germany.
- 64 Universität Rostock, Fakultät für Informatik und Elektrotechnik, Institut für Allgemeine Elektrotechnik, A.-Einstein-Str. 2, 18051 Rostock, Germany.
- 65 Université de Provence et CNRS, Avenue Escadrille Normandie-Niemen, 13397 Marseille Cedex 20, France.
- 66 Université de Rennes 1, Institut de Physique, 2 rue du Thabor - CS 46510, 35065 Rennes Cedex, France.
- 67 University College London, Department of Physics and Astronomy, Gower Street, London WC1E 6BT, UK.
- 68 University of Padova, Dept. of Information Engineering, via Gradenigo 6/A, 35131 Padova, Italy.
- 69 University of York, Department of Physics, Heslington, York YO10 5DD, UK.
- 70 University of Oxford, Department of Physics, Clarendon Laboratory, Parks Road, Oxford OX1 3PU, UK.
- 71 Uppsala University, Laboratory of Molecular Biophysics, Husargatan 3, P.O. Box 596, 75124 Uppsala, Sweden.
- 72 Uppsala University, The Svedberg Laboratory, 75121 Uppsala, Sweden.

Foreword

This report contains a comprehensive technical description of a new international research infrastructure, the European X-Ray Free-Electron Laser (XFEL) Facility. It was written between October 2005 and June 2006 and provides a realistic cost estimate and a compelling assessment of the scientific pay-off. The report has been prepared with the contribution of hundreds of people from many laboratories in Europe and even beyond. Their contributions have been harmonised and merged by many editors, and the whole effort has been coordinated by the European Project Team, generously supported and hosted by the Deutsches Elektronen-Synchrotron (DESY) laboratory.

It is important and worthwhile to mention the large number of scientists and engineers who have contributed to the preparation of this report, not only to fulfil our obligation to acknowledge and thank them for their work, but also to underline that the perspective of this new international research enterprise generates support and enthusiasm in a wide community spread over many countries.

In spite of the rather pressing time schedule, it was possible to subject intermediate versions of the different chapters to two reviews by the Scientific and Technical Issues (STI) Working Group, enlarged by additional experts in accelerator physics and in the scientific use of photons. The support of these review panels provided strong encouragement, and their constructive advice resulted in many improvements to the clarity and completeness of the report. We, therefore, express our gratitude to them as well.

We hope that this report will contribute to communicating our deep conviction that a brilliant source of ultra-short, spatially coherent x-rays is an indispensable component of the European scientific landscape for the forthcoming decades.

The European Project Team

Massimo Altarelli
Reinhard Brinkmann
Thomas Delissen
Andreas Schwarz
Thomas Tschentscher
Karl Witte

Hamburg, July 2006

Executive summary

1 Basic objectives

This report contains a full technical description of the European X-Ray Free-Electron Laser (XFEL) Facility, a new international scientific infrastructure to be built in the north west of Hamburg. The purpose of the facility is to generate *extremely brilliant* (peak brilliance $\sim 10^{33}$ photons/s/mm²/mrad²/0.1%BW), *ultra-short* (~ 100 fs) pulses of *spatially coherent* x-rays with wavelengths down to 0.1 nm, and to exploit them for revolutionary scientific experiments in a variety of disciplines spanning physics, chemistry, materials science and biology. The design contains a baseline facility and provisions to facilitate future extensions and improvements, in preparation for further progress in the relevant technologies. The basic process adopted to generate the x-ray pulses is Self-Amplified Spontaneous Emission (SASE), whereby electron bunches are generated in a high-brightness gun, brought to high energy (up to 20 GeV) through a superconducting linear accelerator (linac), and conveyed to long (up to ~ 200 m) undulators where the x-rays are generated. Five photon beamlines deliver the x-ray pulses to ten experimental stations, where state-of-the-art equipment is available for the experiments.

From this new user facility, novel results of fundamental importance can be expected in materials physics, plasma physics, planet science and astrophysics, chemistry, structural biology and biochemistry, with significant possible impact on technologies such as nuclear fusion, catalysis, combustion (and their environmental aspects), as well as on biomedical and pharmaceutical technologies. Thanks to its superconducting accelerator technology, in spite of competing American and Japanese projects, the European XFEL Facility will allow Europe to keep its leadership in basic and applied science with accelerator-based light sources, a leadership it acquired in the early 90s with the construction and operation of the European Synchrotron Radiation Facility (ESRF) in Grenoble.

2 History of the project

The basic technology underlying the European XFEL Facility is the superconducting linac technology, developed by an international collaboration coordinated by the Deutsches Elektronen-Synchrotron (DESY) laboratory in Hamburg, with the initial objective to create a Tera-Electronvolt Superconducting Linear Accelerator (TESLA), an electron-positron linear collider with TeV energy, for particle physics studies, hence, the name TESLA technology. It was soon realised that this type of innovative linac had ideal characteristics for an x-ray free-electron laser. Proposals to build a free-electron laser, first as a side branch of the linear collider, and later as a self-standing facility, were put forward by DESY to the German government. The construction of a test facility (TESLA Test Facility 1, or TTF1) was undertaken, and lasing down to ~ 90 nm wavelengths was successfully demonstrated in 2000. TESLA Test Facility 2 (TTF2) had the more

Executive summary

ambitious goal to push lasing to 6 nm wavelengths, with a 1 GeV linac. This should be achieved in 2007; in the meantime, acceleration of electrons up to 0.75 GeV resulted in lasing at 32 nm (January 2005) and at 13 nm (April 2006), and a vigorous user programme was started in August 2005 in the experiments hall downstream from the free-electron laser, forming what is now called the Free-electron LASer in Hamburg (FLASH) facility. In 2003, the German government decided to launch the proposal to constitute a European facility for the construction and operation of an x-ray free-electron laser in Hamburg, undertaking the commitment to finance the new facility by providing up to 60% of its construction costs, and up to 40% of the operation costs. The choice of the location in Hamburg is motivated by the possibility of taking advantage of the unique experience and know-how of the DESY Machine Division in the area of superconducting linacs, and of the possibility of gaining first-hand experience on the operation of a free-electron laser (FEL) through the FLASH facility.

3 The scientific case and the X-ray FEL international context

All natural sciences benefit from the use of photons (light waves) of different wavelengths to probe the phenomena of nature. The use of infrared, visible and near ultraviolet light has been revolutionised by the invention of gas lasers and of solid-state lasers, with their properties of high brilliance, spatial coherence and, in more recent decades, ultrashort pulses, with duration down to a few femtoseconds or less (1 femtosecond, or 1 fs, equals a billionth of a millionth of a second; light travels a distance of 0.3 μm in 1 fs). This timescale is of particular importance because atoms in molecules and solids oscillate around their equilibrium positions with typical periods of a few hundreds of femtoseconds, and in general, movements of atoms during the rearrangement of their positions in chemical reactions, or phase transformations also occur on such a timescale.

In the range of the ultraviolet, soft x-ray and hard x-ray wavelengths, great progress was achieved by the exploitation of synchrotron radiation, the brilliant emission by electrons or positrons orbiting in a circular accelerator. Synchrotron radiation, however, is far less brilliant than a powerful laser, has a very limited degree of spatial coherence, and it comes typically in pulses of $\sim 30 \text{ ps} = 30,000 \text{ fs}$ duration. The objective of the modern projects for the realisation of x-ray free-electron lasers is the extension of the scientific and technological revolution, ushered in by lasers in the visible light range, to the x-ray range, providing spatially coherent pulses of $< 100 \text{ fs}$ duration, with peak powers of many GW.

As discussed in four international workshops organised between October 2005 and March 2006 in Hamburg, Paris, Copenhagen, and near Oxford, the outstanding properties of the European XFEL beams (coherence, ultra-high brilliance and time structure) and the development of appropriate detectors and instrumentation will allow completely new experiments. A few examples are listed overleaf.

Coherence can be used for holographic and lensless imaging in materials science and biology. Spectacular possibilities open up, as detailed theoretical studies and simulations

predict that, with a single very short and intense coherent x-ray pulse from the XFEL, a diffraction pattern may be recorded from a large macromolecule, a virus, or a cell, without the need for crystalline periodicity. This would eliminate a formidable bottleneck for many systems of high interest, e.g. membrane proteins, viruses and viral genomes. Measurement of the over-sampled x-ray diffraction pattern permits phase retrieval and hence, structure determination. Although individual samples would eventually be destroyed by the very intense x-ray pulse, a three-dimensional data set could be assembled, when copies of a reproducible sample are exposed to the beam one by one.

The high intensity can also be used to produce highly ionised states of atoms, generating in the laboratory, conditions and processes occurring in interstellar gases. In conjunction with the ultra-short pulse duration, it can be exploited in pump-and-probe experiments, where conventional laser pulses (pump) are used to trigger a chemical reaction or a phase transition, and the XFEL pulses (probe), each following the pump pulse with a well determined delay (from ~50 fs up to nanosecond or even μ s), provide a "movie" of the atomic displacements and rearrangement of chemical bonds. In this way, catalytic mechanisms in chemical and biochemical reactions can be elucidated, fast reactions (e.g. combustion) can be subject to detailed investigation, nucleation of ordered phases at phase transitions can be imaged, and hitherto inaccessible states of matter can be brought to experimental investigation: if the pump pulse is sufficiently powerful to produce a plasma, the x-ray pulse can still penetrate the highly ionised medium (opaque to visible light) and provide information on the propagation of the shock front, on the time evolution of temperature and pressure distributions and on the equation of state.

As already emphasised, the potential relevance of scientific breakthroughs of this caliber extends beyond basic science, to technologies of essential importance for Europe. It would not be wise to leave a competitive advantage in this field to the United States, where the Linac Coherent Light Source (LCLS) project is well under way at Stanford, and to Japan, where the Spring-8 Compact SASE Source (SCSS) has already in 2006 obtained the financial green light for start-up. Although these projects started already, and are probably going to be completed earlier, the European XFEL adoption of the superconducting accelerator technology allows the production of 30,000 x-ray pulses per second (and possibly even more in the future), compared to the 120 of the LCLS and the 60 of the SCSS. In addition to this decisive technical advantage, reducing the time necessary to complete some experiments by two orders of magnitude, the useful experience acquired with FLASH could considerably benefit the rapid establishment of a successful scientific exploitation. If the European XFEL Facility keeps a schedule comparable to that of the competing projects, it can occupy the leading position in this field.

A European laboratory in Hamburg and Schleswig-Holstein, pursuing excellence in the physics and applications of hard x-ray free-electron laser radiation would be complementary to other projects in Europe emphasising the soft x-ray part of the spectrum, and benefit all of them through the development and sharing of common technologies.

4 Layout and performance goals of the facility

The main components of the facility are (see Figure 4.1) the:

- injector;
- linac;
- beam distribution system;
- undulators;
- photon beamlines;
- instruments in the Experiments Hall.

These components are disposed along an essentially linear geometry, 3.4 km long, starting on the DESY campus in the northwest part of the city of Hamburg, and ending in the neighbouring Federal State of Schleswig-Holstein, south of the city of Schenefeld, where the experimental hall is located.

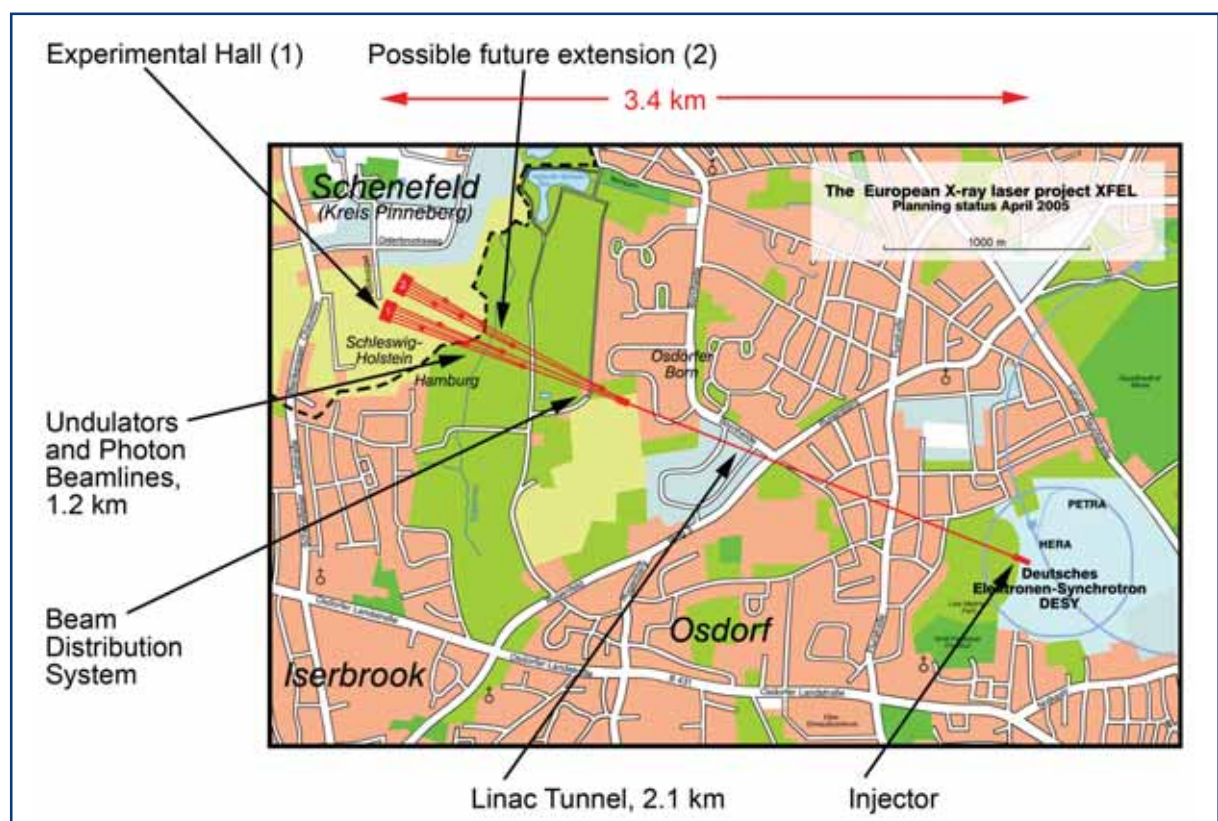


Figure 4.1 Schematic layout of the main components of the European XFEL Facility.

The basic functions of the main components are schematically described in the following. In the injector, electron bunches are extracted from a solid cathode by a laser beam, accelerated by an electron radio frequency (RF) gun and directed towards the linac with an exit energy of 120 MeV. In the linac, consisting of a 1.6 km long sequence of superconducting accelerating modules, magnets for beam steering and focusing, and diagnostic equipment, the electrons are accelerated to energies of up to 20 GeV (17.5 GeV is the energy foreseen for the standard mode of operation of the XFEL facility). Along the accelerator, two stages of bunch compression are located, to produce the short and very dense electron bunches required to trigger the SASE process. At the end of the linac, the individual electron bunches are channeled down one or the other of two electron beamlines by the beam distribution system (Figure 4.2). Electron bunches channeled down the electron beamline 1 pass through the undulators SASE 1 and SASE 3, producing respectively hard x-ray photons with 0.1 nm wavelength (SASE 1) and softer x-ray photons with 0.4 -1.6 nm wavelength (SASE 3), by the SASE FEL process. After going through SASE 3, electrons are deviated towards a beam dump. Electron bunches channeled through the electron beamline 2 are led through the undulator SASE 2, where hard x-ray photons with wavelengths 0.1-0.4 nm are produced by the SASE process; and then through the undulators U 1 and U 2, before ending in the second beam dump. In U 1 and U 2, very hard x-ray photons (wavelengths down to 0.014 and 0.06 nm, respectively) are generated by the spontaneous emission process. The photons generated by the five undulators are transported through the respective photon beamline to the experimental hall, where they are fed into ten experimental stations. Reducing the electron energy at the end of the accelerator would generate longer wavelengths, in case they are required by some experiments; for example, an electron energy of 10 GeV would correspond to x-rays of 4.9 nm wavelength from the SASE 3 undulator.

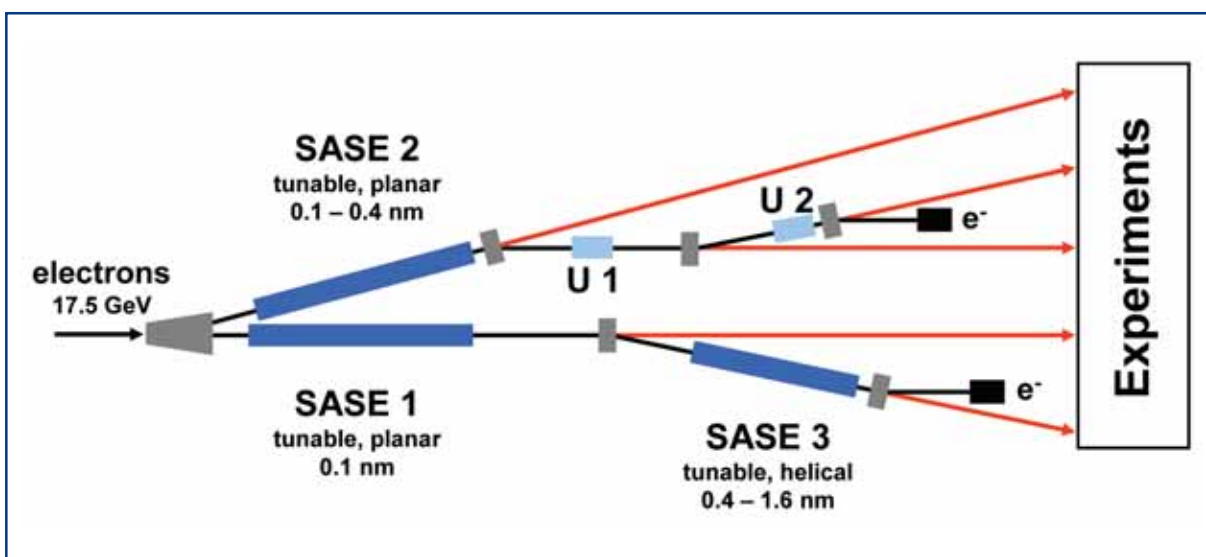


Figure 4.2 Schematic view of the branching of electron (black) and photon (red) beamlines through the different SASE and spontaneous emission undulators. Electron beamlines terminate in the two beam dumps and photon beamlines in the experimental hall.

Executive summary

The installation and commissioning of the accelerator, the undulators, beamlines and experimental stations will take place gradually, according to a strategy for the achievement of intermediate and final goals of the facility which was established with the advice of the Scientific and Technical Issues (STI) Working Group.

The first electron beamline and the SASE 1 undulator are going to be installed first. The commissioning of the accelerator and of the SASE 1 undulator, beamline and first station will be pursued, in parallel with installation of the other electron branch, until the first set of intermediate goals (see Table 4.1) is reached.

As recommended by the STI Working Group, the following criteria for the start of operation of the accelerator complex and the SASE radiators and beamlines were adopted:

- The accelerator complex and SASE 1 start operation when on SASE 1 a photon beam is obtained with the intermediate values of Table 4.1, and sufficient equipment is installed and commissioned to perform first scientific experiments.
- SASE 2 starts operation when the same criteria as above are fulfilled, for wavelengths between 0.2 and 0.4 nm.
- SASE 3 starts operation when the same criteria as above are fulfilled, for wavelengths between 2 and 6 nm.

Following the positive experience of the FLASH facility, developments towards the final project goals on all beamlines will proceed in parallel with early user operation, as soon as the criteria stated above are fulfilled.

Parameter	SASE 1 intermediate values	SASE1 final project values	Units
Wavelength	< 0.2	0.1	nm
Peak brilliance	10^{30}	5×10^{33}	Photons/s/mm ² / mrad ² /0.1% BW
Dimension at sample (no optics)	< 1.0	~ 0.6	mm ² , FWHM % of beam size,
Positional stability	50	10	rms
Photon energy stability	~ 0.1	~ 0.1	%
Shot-to-shot intensity fluctuations	Up to a factor 10	0.3 – 0.5	Dimensionless, peak-to-peak

Table 4.1 *Intermediate and final project values for the accelerator and SASE 1 undulator and corresponding photon beamline.*

5 Cost, schedule and personnel

5.1 Cost of the project

All costs from the project preparation to the commissioning phase (i.e. prior to the start of operation) have to be summed up in order to determine the total project construction cost (TPCC). There will be a period of about 2.5 years during which an overlap of construction, commissioning and operation will occur (see also the discussion of the time schedule and budget profile below). The contributions to the TPCC, summarised in Table 5.1, are:

- The project preparation costs. These are the expenses since the XFEL Memorandum of Understanding (MOU) came into effect (end of 2004), incurred by DESY and by institutes which have concluded collaboration contracts with DESY under the XFEL MoU.
- The construction costs in the proper sense, of the accelerator, the undulators, the photon beamlines, scientific instruments, civil engineering and technical infrastructure of the European XFEL Facility, including capital investment and manpower.
- The cost of commissioning the facility with beam.
- An addition to the personnel cost, in order to take into account allowances for personnel moving from their home country to work at the XFEL company.
- An additional personnel cost overhead, taking account of the XFEL company's management and support costs.

Recurrent costs during the construction in the proper sense (electricity, water, Helium) are not included in the TPCC, since they will be covered by the DESY operation budget free of charge to the XFEL project. Costs related to land acquisition are also not included in the TPCC, since Germany offered to provide the ground free of charge to the project.

Project preparation	38.8 M€
<i>Project construction, capital investment</i>	<i>736.3 M€</i>
<i>Project construction, personnel</i>	<i>250.1 M€</i>
Total construction cost	986.4 M€
Beam commissioning	56.4 M€
Total project construction cost	1,081.6 M€

Table 5.1 *Total project cost, including preparation – commissioning phases. All cost figures are on the price basis of the year 2005. - The original Table 5.1 of the TDR has been slightly re-arranged: the additional personnel cost (allowances) and the additional management overhead of the XFEL GmbH, initially shown in separate lines of the table, are now included in the cost for construction and commissioning.*

Executive summary

As described in detail in Chapter 10, the breakdown of this cost between the major components of the facility, is displayed in Figure 5.1.

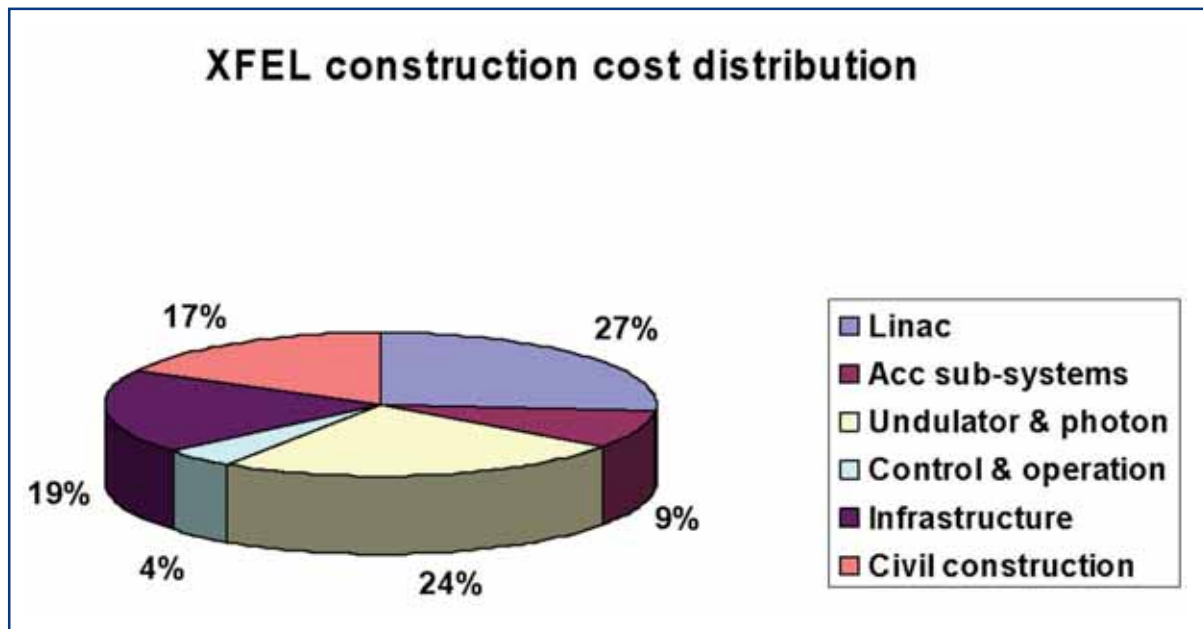


Figure 5.1 Breakdown of the proper construction costs (sum of capital investment and personnel cost) into the work package groups corresponding to the main components of the facility.

An analysis of the risk of overspend was performed according to guidelines specified by the Full Costing Issues (FCI) subgroup of the Administration and Financial Issues (AFI) Working Group. The resulting risk budget (8% of the proper construction costs) amounts to 78 M€, and is the additional figure required to bring the probability of successful completion of the facility within budget to 98%.

The estimated yearly operation costs of the facility, after the end of all construction, are 83.6 M€, including all recurrent costs for operation, maintenance and refurbishment, and support of the international user activities, plus a PhD student and a visiting scientists programme.

5.2 Project time schedule

The time schedule for the project is presented in Figure 5.2, which assumes that the official start of the project construction is January 2007. For each of the major parts of the facility, phases during construction (which can partially overlap in time) can be defined as:

- design, prototyping and industrialisation;
- fabrication (including pre-series);
- installation;
- commissioning (technical and with beam).

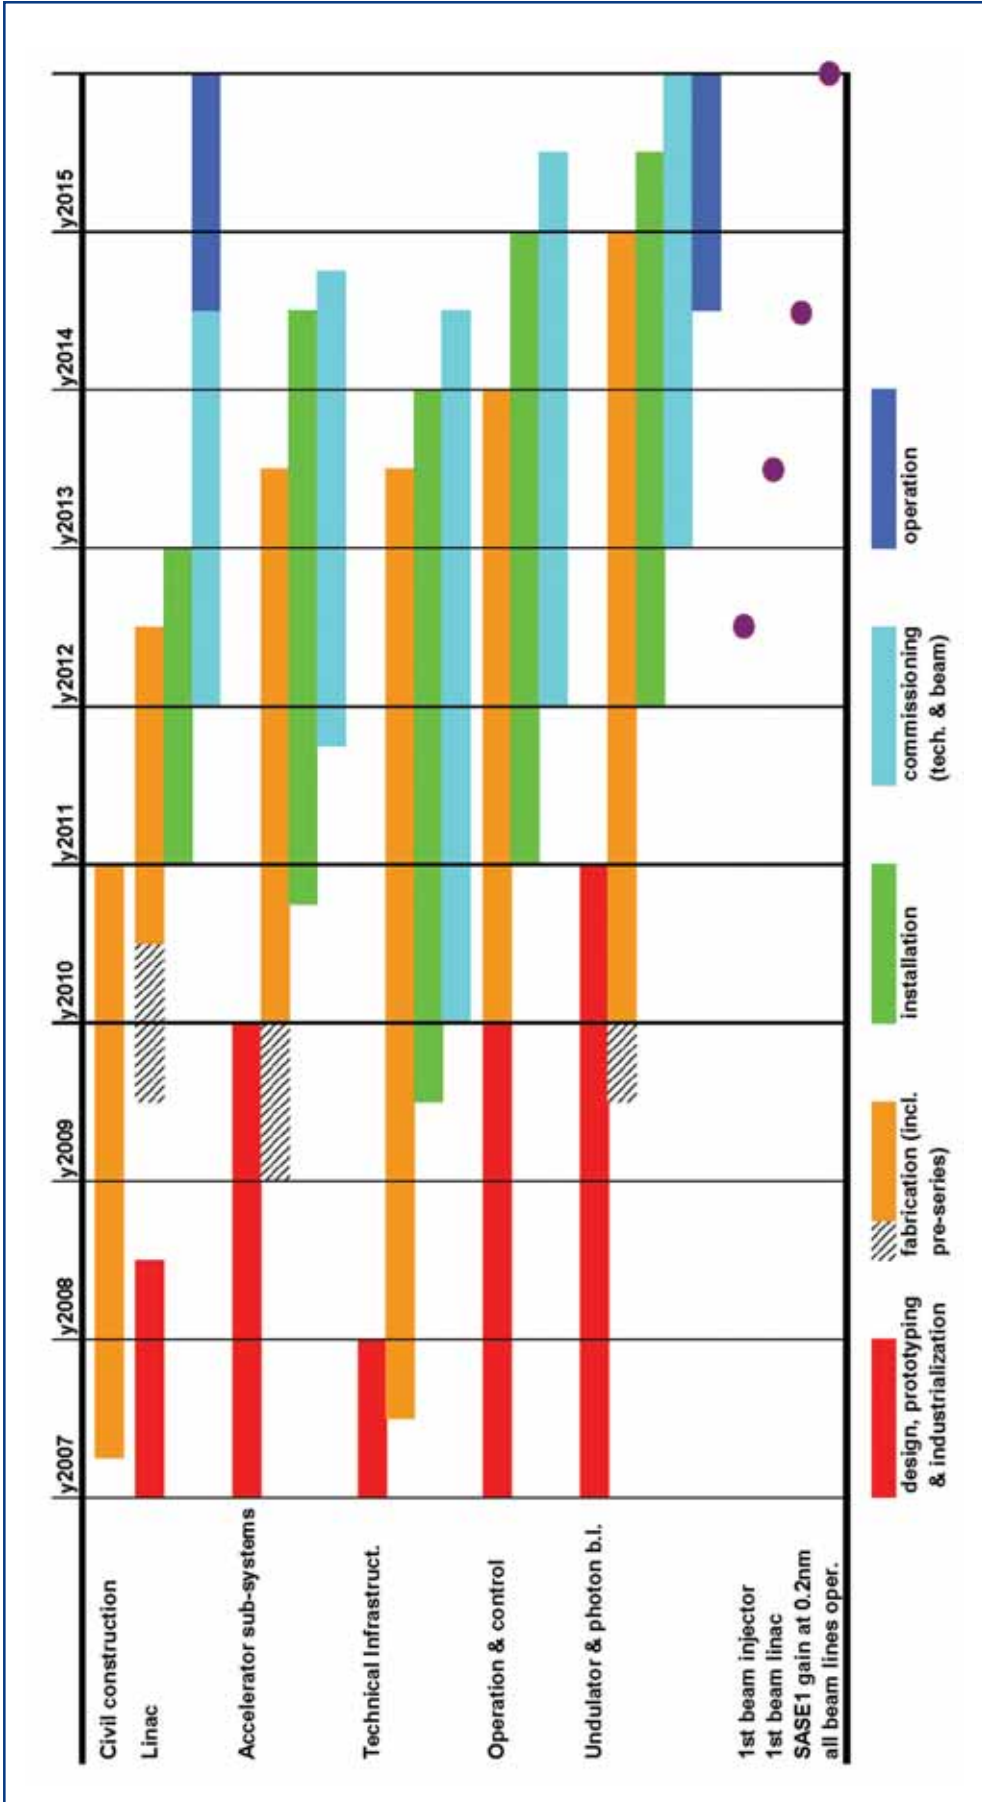


Figure 5.2 Sketch of the schedule for the main components of the facility from start of construction to beginning of operation.

Executive summary

In summary, the construction schedule provides for the milestone of first beam into the linac to be met 6.5 years after the start of construction. At this point in time, the first branch of beamlines with the SASE 1 undulator will also have been installed. Beam commissioning will then progress until the intermediate performance milestones of SASE 1 radiation are reached, 7.5 years after the start of construction. This beamline will then become operational for first experiments. Commissioning of the other beamlines follows.

5.3 Budget profile

With the different contributions to the TPCC as summarised already, the construction time schedule and the operation costs as described in Chapter 8, a complete budget profile for all phases from preparation to operation can be constructed. The result is displayed in Figure 5.3 showing the yearly budget from 2005-2016 on the price basis of the year 2005 (i.e. without applying an escalation to take inflation into account).

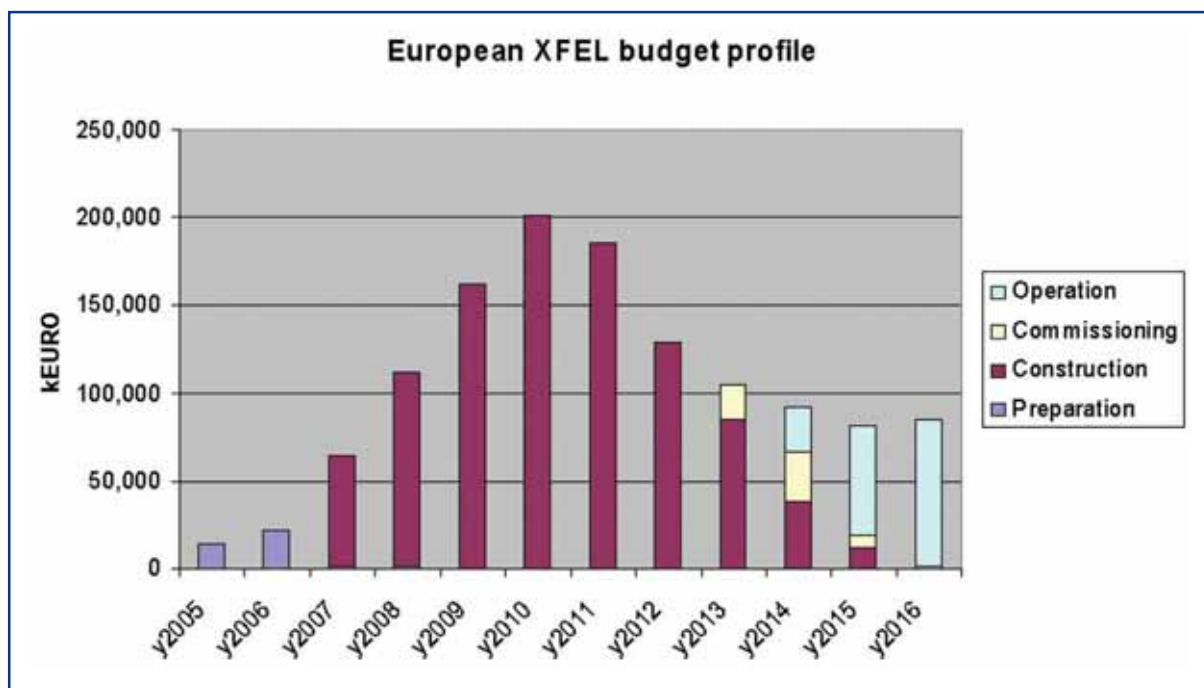


Figure 5.3 Budget profile (sum of capital investment and personnel cost on year 2005 price basis) from preparation to operation phase of the project.

Personnel costs, as given explicitly in Table 5.1 and implicitly in Figure 5.3 correspond to the cost of the personnel hired by the facility, plus the personnel costs for those work packages of the project, which are provided, as an in-kind contribution, by participating countries' laboratories.